


Combining Turing Machines

We will define notation that will make it easier to look at more complicated Turing machines

- Given Turing Machines M1 and M2

Notation for


- Run M1
- Run M2

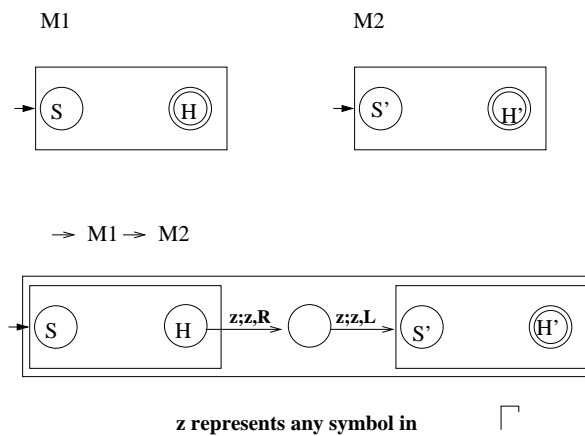

- Given Turing Machines M1 and M2

Notation for




- Run M1
- If x is current symbol
 - then Run M2

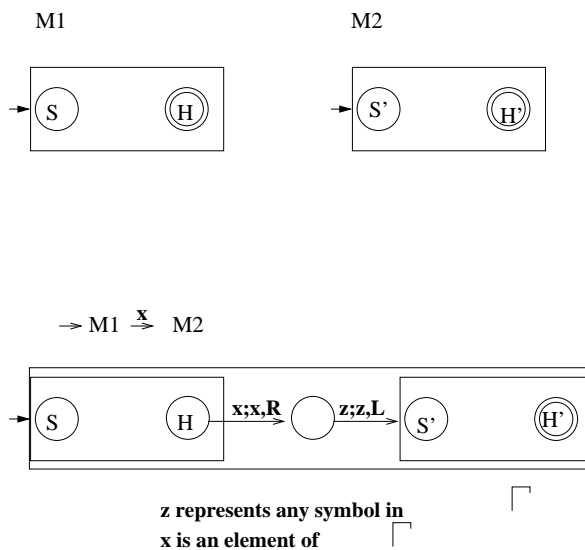

3. Given Turing Machines M1, M2, and M3

Notation for

- Run M1
- If x is current symbol
 - then Run M2
 - else Run M3

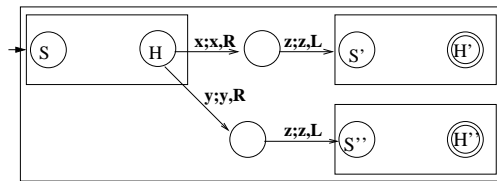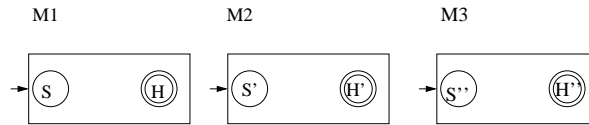

x is an element of Γ
 y is any element except x from Γ
 z is any element from Γ

More Notation for Simplifying Turing Machines

Suppose $\Sigma = \{a, b, c, B\}$

z is any symbol in Σ ,

x is a specific symbol from Σ ,

1. s - start
2. R - move right
3. L - move left
4. x - write x (and don't move)
5. R_a - move right until you see an a
6. L_a - move left until you see an a
7. $R_{\neg a}$ - move right until you see anything that is not an a
8. $L_{\neg a}$ - move left until you see anything that is not an a
9. h - halt in a final state
10. $\left. \begin{matrix} a, b \\ \rightarrow \end{matrix} \right\} \xrightarrow{w}$

If the current symbol is a or b , let w represent the current symbol.


Example

Assume input string $w \in \Sigma^+$, $\Sigma = \{a, b\}$.

If $|w|$ is odd, then write a b at the end of the string. The tape head should finish pointing at the leftmost symbol of w .

input: bab, output: babb

input: ba, output: ba

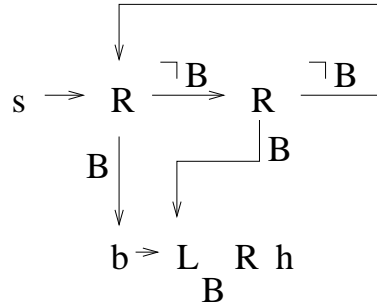

What is the running time?

Example

Assume input string $w \in \Sigma^+$, $\Sigma = \{a, b\}$, $|w| > 0$

For each a in the string, append a b to the end of the string.

input: *abbabb*, output: *abbabbbb*

The tape head should finish pointing at the leftmost symbol of w .

Turing's Thesis Any computation that can be carried out by a mechanical means can be performed by a TM.

Definition: An *algorithm* for a function $f:D \rightarrow R$ is a TM M , which given input $d \in D$, halts with answer $f(d) \in R$.

Example: $f(x + y) = x + y$, x and y unary numbers.

start with: 111+1111
 \uparrow
 end with: 1111111
 \uparrow


Example: Copy a String, $f(w)=w0w$, $w \in \Sigma^*$, $\Sigma = \{a, b, c\}$


Denoted by C

start with: abac
 \uparrow
 end with: abac0abac
 \uparrow

Algorithm:

- Write a 0 at end of string
- For each symbol in string
 - make a copy of the symbol

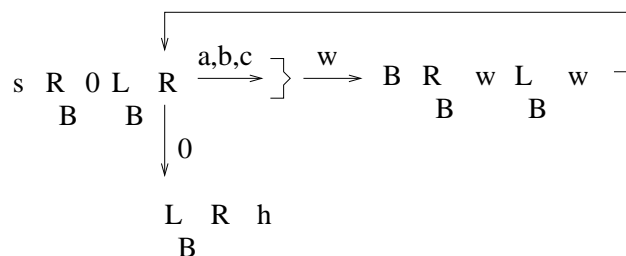

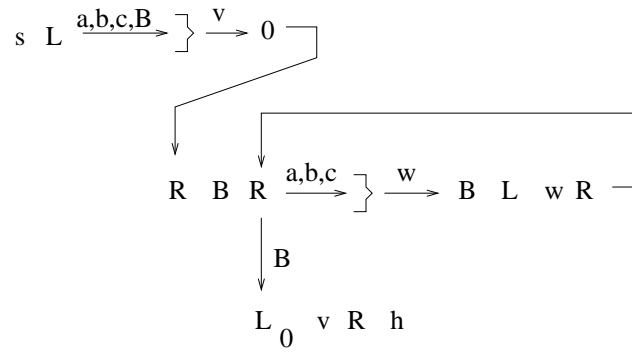

Example: Add unary numbers

This time use shift.

Example: Multiply two unary numbers, $f(x*y)=x*y$, x and y unary numbers. Assume $x,y>0$.

start with:	1111*11
	↑
end with:	11111111
	↑